

**CARDEV**

Oil Filtration and Coolant Handling Specialists



# 2S350C8

*Removes Contaminants*

*Extends Oil Life*

*Reduces Component Wear*

*Removes all Water*

*Saves Machine Downtime*

*Reduces Disposal Costs*

*Simple to Install & Use*

*Low Maintenance Costs*

*Built in Sampling Points*




Cardev International Ltd

Ripon Way, Harrogate, HG1 2AU  
Tel: 01423 522911 Fax: 01423 530043  
Email: sales@cardev.co.uk or visit our  
website at: www.cardev.co.uk





**SDUH8**

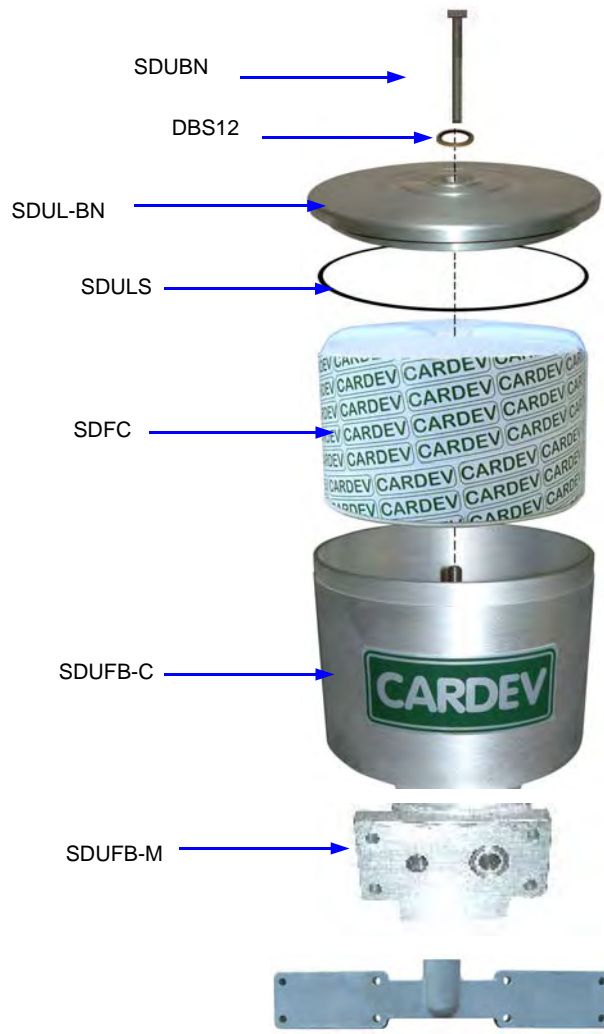

**HIGH PRESSURE BALL VALVE**  
HPBV38



**FLOW CONTROL VALVE**  
FCV08



**DUMP VALVE**  
DV12 4 BAR



**FLANGE 'O' RING**  
SDUFB-CO

**LONG FLANGE**  
SDUFB-CLF

Type	Recommended Installation	Ltr/hr	Filter element type	Dimensions			Connections		Weight (kg)
				Height (mm)	Length (mm)	Width (mm)	INLET	OUTLET	
2S350C8	By-pass with max. 350 bar inlet and 0.5 bar back pressure up to 400 litres	480	SDFC or SDFC-P	349	570	217	0.375"	0.75"	31.9